

Josephson junction simulation of neurons

Patrick Crotty,¹ Dan Schult,² and Ken Segall¹

¹*Physics Department, Colgate University, Hamilton, NY, USA*

²*Mathematics Department, Colgate University, Hamilton, NY, USA*

With the goal of understanding the intricate behavior and dynamics of collections of neurons, we present superconducting circuits containing Josephson junctions that model biologically realistic neurons. These “Josephson junction neurons” reproduce many characteristic behaviors of biological neurons such as action potentials, refractory periods, and firing thresholds. They can be coupled together in ways that mimic electrical and chemical synapses. Using existing fabrication technologies, large interconnected networks of Josephson junction neurons would operate fully in parallel. They would be orders of magnitude faster than both traditional computer simulations and biological neural networks. Josephson junction neurons provide a new tool for exploring long-term large-scale dynamics for networks of neurons.

Keywords: neuron model — neural networks — Josephson junction — Hodgkin-Huxley

How do large networks of neurons organize, communicate and collaborate to create the intrinsic behaviors and dynamics of the brain? Over the past century, individual neurons have been studied at the cellular, compartmental and molecular level. Synaptic models, while still somewhat rudimentary, accurately reflect many basic features of synapses and how they modify signals between neurons. Today, it is becoming feasible to explore networks of neurons behaving as units, how they synchronize, provide top-down or bottom-up feedback, and encode sensory information. This exploration is an important step toward understanding the brain, which will require multi-scale analysis with models of collective behavior at many different levels simultaneously.

As part of this effort it is important that we understand how networks of neurons behave on the scale of thousands to tens of thousands of neurons, the size of a typical neocortical column. Large scale digital simulation projects such as the Blue Brain [1, 2] and PetaVision [3] projects have demonstrated that the limitations of inherently serial computer processors can be improved by effective parallel computing designs. But simulation time remains a significant hurdle to including biologically realistic features in large scale simulations. Analog simulations using VLSI circuitry to mimic neurons and synapses are improving in realism and speed, but they are still limited by complexity and power consumption. We propose a new direction for analog simulation of large scale networks of biologically realistic neurons. Using superconducting Josephson junctions to model neurons connected with real-time synaptic circuitry, we can explore neural network dynamics orders of magnitude faster than current digital or analog techniques allow. Using these circuits, we hope to learn about neural interactions such as synchronization, long term dynamics and bifurcations, feature identification and information processing. The long term goal is to understand group behavior of neurons sufficiently to use them as building blocks for studying larger scale neural networks and brain behavior.

Our basic circuit unit (the JJ Neuron) involves two Josephson junctions connected in a loop as shown on the left side of Fig. 1. The individual junctions behave phenomenologically like ion channels: one corresponds to a depolarizing current (like Na^+), and the other to a hyperpolarizing current (like K^+). Enhancements are possible, of course, and the inclusion of a third junction could allow for behaviors such as bursting that generally require at least three currents. The circuit displays many features of biologically realistic neurons such as the evocation of action potentials (firing) in response to input currents or pulses, input strength thresholds below which no action potential is evoked, and refractory periods after firing during which it is difficult to initiate another action potential [4, 5].

The JJ Neuron is a variation of well developed Rapid Single Flux Quantum (RSFQ) [6–8] circuitry and is thus straightforward to fabricate. RSFQ circuits using 20,000 junctions have been fabricated [9], so we estimate that a single chip could model as many as $N = 10,000$ neurons, about the number of neurons in a cortical column. For larger brain regions, chips could be connected together. A simulated action potential takes about 50 picoseconds, and all neurons act in parallel. Fig 2 shows a comparison of the speed of a JJ neuron with that of biological neurons and digital simulations using established models. The figure of merit displayed is the number of action potentials per neuron per second. Speed depends on the arithmetic complexity of the model employed, the number N of neurons simulated and their connectivity. We show speeds for sparse (no connections between neurons) and dense (all neurons connected to all others) networks as two extremes. While our estimates of speed are crude, they suggest that JJ Neurons are several orders of magnitude faster than either digital simulations or biological systems. This speed is due to three advantages: a) Josephson junctions have a shorter characteristic time than the conventional transistors used in computer processors; b) the JJ Neuron takes fewer cycles to simulate an action potential than digital simulations; and c) JJ Neurons compute in parallel using analog connections that do not affect computation time.

This simple circuit simulates a single-compartment (space clamped) neuron and follows the spirit of mathematical neuron models such as Hodgkin and Huxley [10], Fitzhugh-Nagumo [11, 12], Morris-Lecar [13], Hindmarsh-Rose [14]

I. SINGLE NEURON MODEL

Josephson junctions consist of two superconductors separated by a thin insulating barrier [19]. Electrons in each superconductor are described by a coherent wave-function with a definite phase. The phase difference from one side of the barrier to the other is the so-called Josephson phase ϕ , which controls all of the electrical properties of the junction, including the junction's voltage and current. Current can flow through the device without creating a voltage. This so-called super-current can be increased to the junction's critical current I_0 above which a voltage develops given by $V = (\Phi_0/2\pi)d\phi/dt$, where t is time, $\Phi_0 = h/e$ is the flux quantum, h is Planck's constant and e is the electron charge. Normalizing current to this critical current, the current through a junction i depends on the phase ϕ through the relation [20]:

$$i = \ddot{\phi} + \Gamma\dot{\phi} + \sin(\phi). \quad (1)$$

The dot notation refers to differentiation with respect to normalized time τ , where $\tau^2 = t^2\Phi_0 C/2\pi I_0$, with C the capacitance of the junction. The normalized damping parameter is $\Gamma^2 = \Phi_0/2\pi I_0 R^2 C$, where R is the resistance of the junction. The critical current, conductance ($1/R$) and capacitance of a junction are assumed to scale linearly with the cross-sectional area (A) of the junction.

Equation 1 displays a useful analogy between the dynamics of a junction and that of a pendulum, allowing us to describe the action potential-like pulse generated by the circuit. Equation 1 is exactly the equation of motion for a damped and driven pendulum, where ϕ represents the angle of deflection, Γ is the normalized drag constant, and i represents a driving torque. If i is constant in time, long term solutions include both static tilting (gravity balancing the torque) and whirling modes (where the torque overcomes gravitational forces). A third motion is also possible that combines these two. For appropriate parameters, and time dependent torque i , the pendulum will whirl over just once and settle back to a tilted state. In a Josephson junction, the phase whirling over just once creates a magnetic flux pulse, called a Single-Flux-Quantum pulse (SFQ pulse)[8]. This pulse has a similar shape and area each time it is stimulated. Pulses of this type form the action potentials in our neuron model.

The JJ Neuron circuit shown in Fig. 1 connects two Josephson junctions in a superconducting loop. This basic structure is a simplified superconducting digital component from RSFQ logic circuitry called a "DC-to-SFQ converter" [7]. We call the two junctions the pulse junction and the control junction, denoted by subscripts p and c respectively. Two incoming currents (normalized to I_{0p}) are called the input current i_{in} and the bias current i_b which provides energy to the circuit. The signal to the synapse is the voltage across the pulse junction $v_p = \dot{\phi}_p$, though the magnetic flux through the loop could be used for an inductive synapse circuit. The figure shows a model synaptic circuit connected above the pulse junction and thus driven by v_p . The circuit parameters are the indicated branch inductances L_s , L_p , and L_c which we scale by their sum L_{total} to obtain Λ_s , Λ_p and Λ_c . Using current conservation and fluxoid quantization [20], we obtain two equations of motion:

$$\ddot{\phi}_p + \Gamma\dot{\phi}_p + \sin(\phi_p) = i_p = -\lambda(\phi_c + \phi_p) + \Lambda_s i_{in} + (1 - \Lambda_p)i_b, \quad (2)$$

$$\eta [\ddot{\phi}_c + \Gamma\dot{\phi}_c + \sin(\phi_c)] = i_c = -\lambda(\phi_c + \phi_p) + \Lambda_s i_{in} - \Lambda_p i_b. \quad (3)$$

with coupling parameter $\lambda = \Phi_0/2\pi L_{total} I_{0p}$, and geometric parameter $\eta = A_c/A_p$. To make the comparison with RSFQ circuitry more clear, DC-to-SFQ converters usually have $\Lambda_s \approx 1$, $\Lambda_p = \Lambda_c = 0$ and $\eta < 1$, whereas typical parameters for a JJ Neuron are $\Lambda_c = 0$, $\Lambda_s = \Lambda_p = 0.5$, and $\eta = 1$.

To explain how the circuit provides an action potential and then recharges to become ready to provide another, we describe the mechanism for generating a typical pulse. In equilibrium with $i_{in} = 0$, the bias current splits between pulse and control junctions and is large enough to put each junction just below its critical current. They are primed to achieve a whirling state. For $i_{in} > 0$, the input current acts to push the control junction away from whirling while pushing the pulse junction toward the whirling state. When the input current exceeds a threshold, it initiates the action potential: A voltage appears across the pulse junction creating magnetic flux in the loop which is analogous to a neuron's membrane potential rising. The flux in turn induces current in the loop pushing the control junction closer to its whirling state. As the flux builds, the control junction starts to whirl, draining the flux in the loop, ensuring that the pulse junction stops whirling and restoring the system so it can fire again. This process can repeat so long as the incoming current is held above threshold levels. The time lag between the pulse junction whirling, flux building and control junction responding to that flux is what creates the refractory period during which it is extremely difficult to initiate another pulse. The analogy goes beyond the membrane potential's relation to the flux $\Phi = \lambda(\phi_p + \phi_c)$ normalized by $L_{total} I_{0p}$. The pulse voltage v_p is analogous to a polarizing ionic current such as Na^+ while the control voltage v_c is analogous to a hyperpolarizing ionic current such as K^+ .

The flux Φ in the JJ Neuron corresponds to the neuron membrane potential V_m . Voltages across the pulse junction, v_p , and control junction, v_c , correspond to the Na^+ current I_{Na} and K^+ current I_K respectively. The input current i_{in} corresponds to incoming post-synaptic current I_{syn} . With these correspondences, the equation relating change in membrane potential to ionic currents can be written for the JJ Neuron

$$\frac{1}{\lambda} \dot{\Phi} = v_p + v_c. \quad (4)$$

The analogous equation for a neuron is the Cable Equation for a space-clamped 2-channel neuron[16]:

$$C\dot{V}_m = I_K + I_{Na} + I_{syn}. \quad (5)$$

The equations differ in that the synaptic current in (5), I_{syn} , does not appear analogously as i_{in} in (4). Synaptic current does, however, appear implicitly since the phases ϕ_p and ϕ_c depend on i_{in} through (2)-(3). The results of simulations below suggest that these terms have qualitatively similar effects. Like biological APs, the JJ Neuron AP is produced by the interaction of activating and restoring processes.

II. SINGLE NEURON CHARACTERISTICS

Single-neuron characteristics include the action potential, firing threshold and refractory period. JJ Neurons reproduce all three of these behaviors. Fig. 3 shows the voltage trace and ionic currents for APs in the JJ Neuron and Hodgkin-Huxley models.

Fig. 4 demonstrates the firing threshold. It shows the response to a brief current pulse of increasing strength along with an inset showing the threshold dependence of voltage peak on stimulus strength. Stimuli below threshold evoke a small (sub-threshold) response, while above the threshold full APs occur.

Fig. 5 demonstrates the refractory period of the JJ Neuron. It shows the peak response times to two brief current stimulus pulses as the time between pulses varies. Current stimuli which are too closely spaced fail to produce a second AP. We emphasize that this refractory period is not explicitly hard-coded into the model (as for integrate-and-fire models [21]), but appears naturally as a result of differences in the time scales of the activating and restoring processes just as for biological neurons. The slight upturn in the curve for the second peak corresponds to interference between two closely spaced action potentials. In parts b-c are shown time profiles of APs responding to two brief current pulses. For large delay between pulses, the firing time of the second AP depends linearly on delay. When the delay is sufficiently short, no second AP occurs.

III. CONNECTING NEURONS

Synaptic models connect individual neuron models to form a network. Synapses control communication, signal transfers, and timing [22]. They can operate by means of direct electrical connections (electrical “gap junction” synapses) or chemical intermediates called neurotransmitters (chemical synapse). Electrical synapses are modeled by direct connection between JJ Neurons. We focus on chemical synapses here as they are both more complex and more common. Chemical synapses can be excitatory or inhibitory, moving the post-synaptic neuron closer to or farther from threshold respectively. In chemical synapses, an AP causes the release of neurotransmitter molecules which diffuse across the synaptic cleft, bind to receptors on the post-synaptic membrane, and induce input currents in the post-synaptic neuron. The net effect on AP transmission across the synapse is a delay in transmission and the spreading of the pulse. We model the synaptic process using a resonant circuit attached to the pulse junction, shown on the right hand side of Fig. 1. The output is taken across the capacitor and sent through a resistor to the input of a post-synaptic neuron. If the bias current applied to the JJ neuron is positive (negative) with respect to ground, then the synapse is excitatory (inhibitory).

The equations describing our synaptic circuit and the coupling to the next neuron downstream come from Kirchhoff’s laws and involve normalized parameters describing the resonant frequency $\Omega_0 = \tau/\sqrt{L_{syn}C_{syn}}$, quality factor $Q = \Omega_0 R_{syn} C_{syn}/\tau$, synaptic coupling $\Lambda_{syn} = L_{syn}/L_{total}$, and resistive coupling to the next neuron, r_{12} , normalized by R_{0p} . We find that the voltage across the capacitor, v_{out} (normalized by $\Gamma I_{0p} R_{0p}$), and the current coupled to the next neuron, i_{12} (normalized by I_{0p}) are given by:

$$\frac{1}{\Omega_0^2} \ddot{v}_{out} + \frac{Q}{\Omega_0} \dot{v}_{out} + v_{out} = v_p - \frac{Q\Omega_0\Lambda_{syn}}{\lambda} i_{12} - \frac{\Lambda_{syn}}{\lambda} \dot{i}_{12}, \quad (6)$$

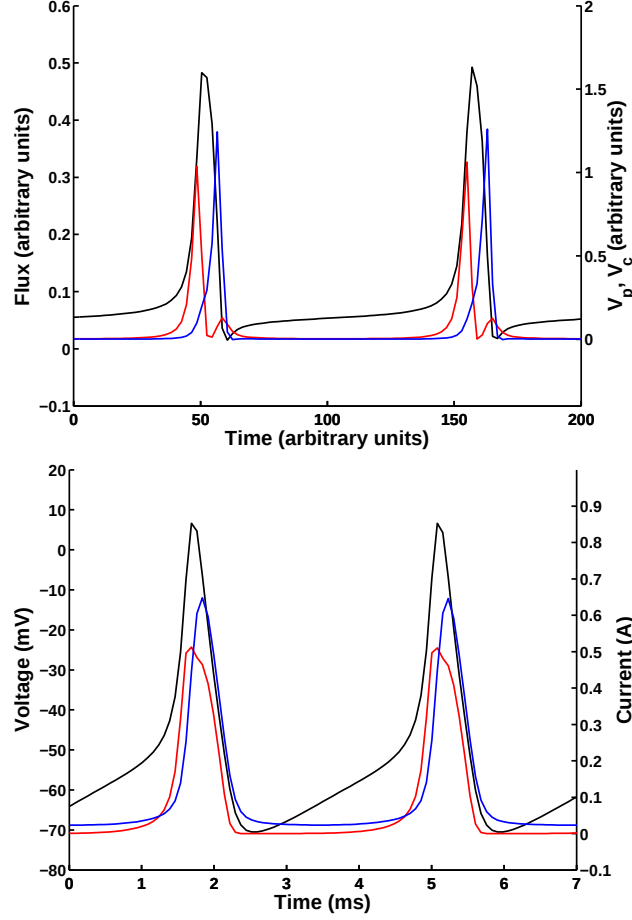


FIG. 3: A. Time profile for action potentials in the JJ Neuron model. Parameter values for JJ Neuron calculations are $\lambda = 0.1$, $\Gamma = 1.5$, $\Lambda_s = \Lambda_b = 0.5$, $\eta = 1$. Input DC current is $i_{in} = 0.21$. B. Time profile for action potentials in the Hodgkin-Huxley model. The flux (black) in the JJ Neuron corresponds to the membrane potential (black) in the Hodgkin-Huxley model. Similarly, the voltages v_p (red) and $-v_c$ (blue) in the JJ Neuron model correspond to the currents $-I_{Na}$ (red) and I_K (blue) in Hodgkin-Huxley model. Parameter values for all Hodgkin-Huxley calculations are $C_m = 1.01 \mu\text{F}/\text{cm}^2$; $\bar{G}_{Na} = 120 \text{ mS}/\text{cm}^2$; $\bar{G}_K = 36 \text{ mS}/\text{cm}^2$; $G_L = 0.3 \text{ mS}/\text{cm}^2$; $E_{Na} = 50 \text{ mV}$; $E_K = -77 \text{ mV}$; $E_L = -54.4 \text{ mV}$; and $T = 18.5^\circ\text{C}$ unless stated otherwise. In this simulation an external stimulating current of 236 nA is applied. The Hodgkin-Huxley neurons are modeled as isopotential cylinders with lengths and diameters of $500 \mu\text{m}$.

$$\frac{\Lambda_{syn}(1 - \Lambda_{syn})}{\lambda} i_{12} + \frac{r_{12}}{\Gamma} i_{12} = v_{out} - \Lambda_{syn}(v_{c2} + v_{p2}). \quad (7)$$

Here v_{p2} and v_{c2} represent the voltage across the pulse and control junction of the next neuron, respectively.

In addition, the synapse circuit's back-action on the JJ Neuron circuit creates two additional terms on the right side of (2): $-i_{12} - \lambda v_{out} / (\Lambda_{syn} \omega_0^2)$. For the simple demonstrations of coupling behavior shown here, this back-action was not strong enough to warrant buffer junctions, as is commonly needed with RSFQ circuits [23]. However, for more complex circuits buffer junctions will most likely be needed.

We demonstrate synaptic behavior for inhibitory and excitatory coupling in a two-neuron setting. The first neuron is connected to the second via a synaptic connection as shown in Fig. 1. The results are shown in Fig. 6-7.

In Fig. 6, we show excitatory coupling from neuron 1 to neuron 2. Neuron 1 receives an external stimulus, and its output drives neuron 2, which responds by firing at the same rate but out of phase with neuron 1.

In Fig. 7, we show inhibitory coupling from neuron 1 to neuron 2. Neuron 2 is configured to fire repetitively by increasing its bias current. When neuron 1 is not firing, this external stimulus causes neuron 2 to fire repeatedly. However, when neuron 1 is stimulated, it inhibits the firing of neuron 2 even though neuron 2 continues to receive the external stimulus. Both return to their original state after the stimulus to neuron 1 is removed. Qualitatively similar results (Fig. 8-9) are obtained with two coupled Hodgkin-Huxley neurons. The back-action of neuron 2 on neuron 1 causes small subthreshold oscillations and a slight decrease in the firing rate of the first neuron ($\sim 10\%$). These minor

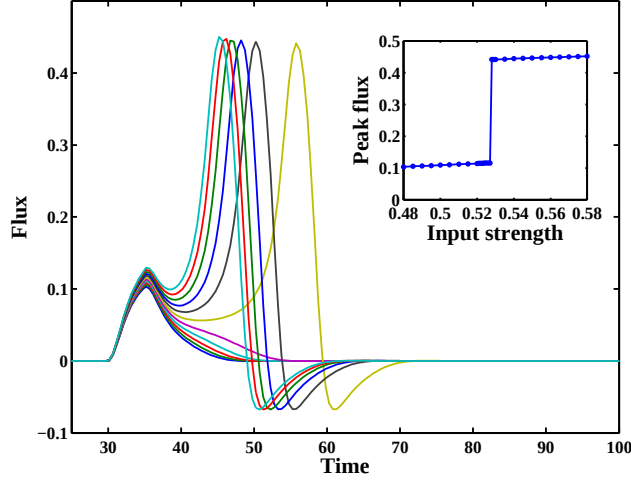


FIG. 4: The threshold response of flux time-traces colored by the strength of impulse input signals. Stronger inputs lead to action potentials. The inset graph shows how peak response depends on the strength of the input pulse. Parameter values as for Fig. 3A except $\Gamma = 1.0$. Input current is a single square pulse of width 5 and varied height initiated at $t = 30$.

effects are not present in the Hodgkin-Huxley model because the alpha function synapse does not allow back-action. Adding buffer junctions between the JJ neurons would be needed to obtain precise agreement.

IV. DISCUSSION

We have shown that the JJ Neuron is a biologically realistic model for single neuron dynamics, and that individual JJ Neurons can be coupled together in ways that are analogous to inhibitory or excitatory chemical synaptic coupling. We envision that large scale long term dynamics of networks of neurons can be explored using JJ Neurons, contributing to our understanding of behaviors such as synchronization, pattern recognition, and memory formation. JJ Neurons

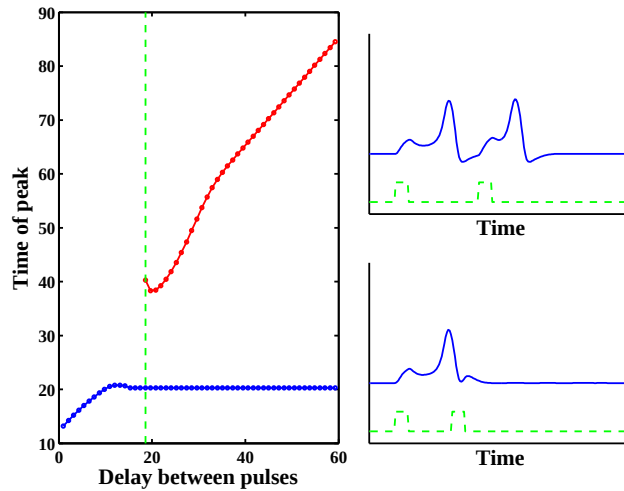


FIG. 5: a) Response to twin pulse inputs with delay shows the absolute refractory period. On the left, the time of the first (blue) and second (red) response peak is graphed against the delay between input pulses. The vertical line represents the delay below which no second pulse is created. On the right, time profiles are shown for input currents (green) and output voltages (blue). In b) two pulses are generated while in c), the delay is too small and no second pulse arises. Parameter values as for Fig. 3A except $\Gamma = 1.0$. Input pulses are twin square pulses of height 0.54, width 5 and varied delay between pulses. The first pulse initiates at $t = 30$.

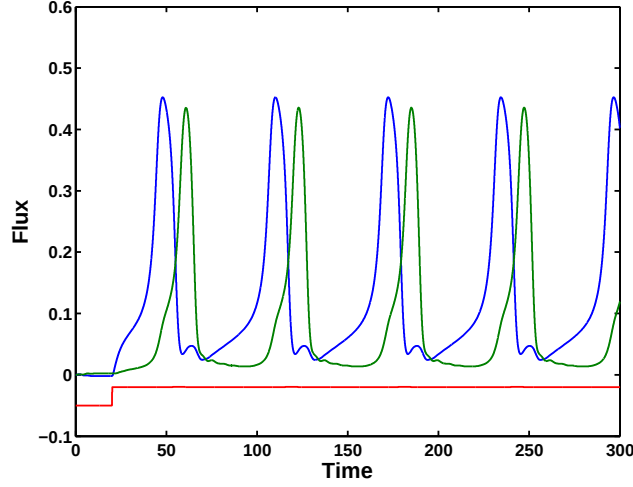


FIG. 6: Excitatory synaptic coupling. One JJ neuron (blue) drives another (green). The system is initially quiet. At time 50, a constant input current (red) causes the first neuron to fire repetitively. Excitatory coupling induces repetitive firing of the second neuron. Parameter values as for Fig. 3A except $i_b = 2.0$, $\Gamma = 2.0$. Synaptic parameters are $\Omega = 1.0$, $Q = 0.05$, $\Lambda_{syn} = 0.3$, $r_{12} = 1.4$. Input current to first neuron is a DC current of $i_{in} = 0.3$ initiated at $t = 20$.

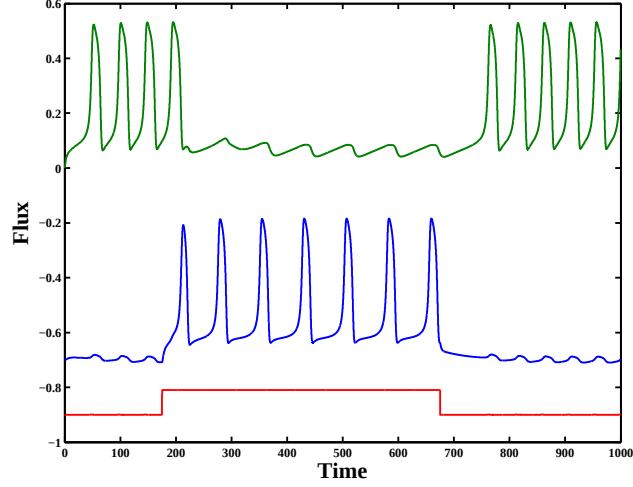


FIG. 7: Inhibitory synaptic coupling. The second neuron (green) is configured to fire repetitively. When the first neuron (blue) is activated by an external input current (red), it inhibits the second. Both return to their original state after the external stimulus to the first neuron is removed. Parameter values as for Fig. 6 except $i_{b1} = -1.9$, $i_{b2} = 1.76$, $\Lambda_{s2} = 0.65$, and $\lambda_{p2} = 0.35$. This puts the second neuron into a repetitive firing mode. Synaptic parameters are also the same except $r_{12} = 0.6$. Input current to first neuron is a single square pulse of height 0.3, width 360, at $t = 240$.

should be able to alleviate computational bottlenecks currently slowing needed simulations. We now discuss the advantages and limitations of this approach.

The advantages of large scale JJ Neuron simulations are speed, biological realism, simplicity of circuit design and low power consumption. The major advantage is speed. Based on similar circuits constructed for RSFQ circuits [6], network simulations of 20,000 densely coupled neurons are reasonable and could simulate one trillion APs for each of these neurons in a few minutes. This speed is unachievable with digital simulations using modern computers. Much of this advantage is due to our analog rather than digital approach.

Analog simulations using electrical circuits to model neurons [24–30] provide a framework more in line with the parallel nature of biological neural networks. Silicon-based Very-Large-Scale-Integrated (VLSI) circuits have been designed which simulate simple integrate and fire neurons [31, 32], bursting neurons [33], and plastic synapses with timing and homeostasis [31, 34]. The focus of VLSI research has been on implementation of a learning processor rather

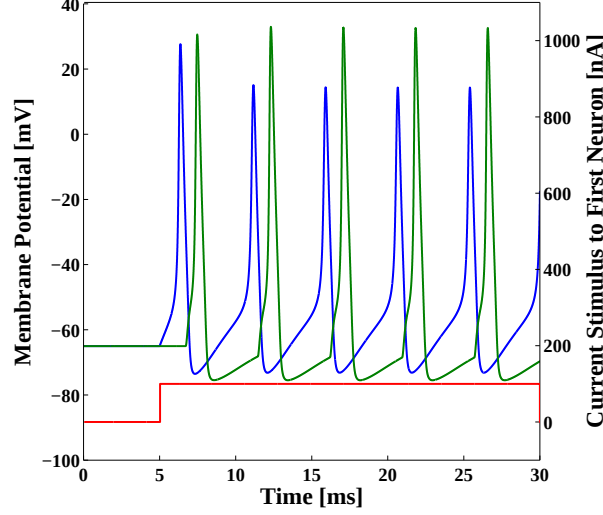


FIG. 8: Behavior of two Hodgkin-Huxley model neurons coupled by a simple excitatory synapse model. The synapse uses a positive “alpha” function [16] with maximum current 400 nA and time scale 0.1 ms which is triggered at -30 mV on the downward slope of the presynaptic neuron’s action potential. The presynaptic neuron (blue) is made to fire repetitively by means of a constant current input (red curve) initiated at time 5 ms. Excitatory coupling then causes repetitive firing of the postsynaptic neuron (green).

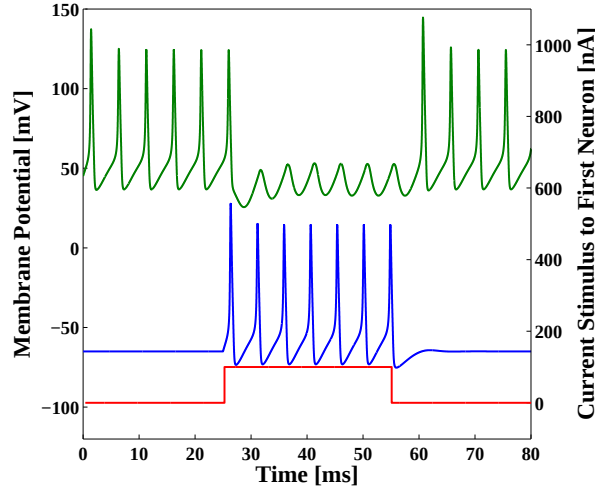


FIG. 9: Behavior of two Hodgkin-Huxley neurons coupled with an inhibitory synapse model using a negative alpha function with maximum current 215 nA and time scale 1 ms. The second neuron (green) has E_L set to -15 mV to make it fire repetitively in the absence of external inputs, while the first has E_L set at the standard -54.4 mV value to make it normally quiescent. When the first neuron (blue) fires as the result of an external input current (red), it inhibits the second. Both return to their original state after the external stimulus to the first neuron is removed.

than simulation of long-term neuron dynamics so speed comparisons are difficult. Speeds of VLSI analog circuits are typically chosen to emulate biological neuron timescales (order milliseconds). Presumably these circuit speeds could be increased up to a few GHz. In contrast, RSFQ processors similar to the JJ Neuron have been clocked on the order of 100 GHz [6]. In addition, the power dissipation for a JJ Neuron network should be significantly less than a VLSI circuit of the same size, allowing larger networks. Finally, the non-linear behavior of Josephson junctions allows a JJ Neuron to contain only two Josephson junctions, much smaller than the 22 transistors for a VLSI Integrate and Fire

neuron [31].

The major limitation of JJ Neuron models compared to digital simulations is measurement. While every neuron in a computer simulation can be separately monitored, this is not technically feasible in large networks of JJ neurons. So for settings which require detailed monitoring of each cell in the network, the JJ Neuron is not appropriate. But many settings do not require such detailed observation, instead measuring averaged output or the output of a few key neurons. The measurable data from JJ Neuron experiments aligns more closely with measurements of living tissue. Placing magnetic field detectors on the chip allows measurement of averaged activity levels, and subsequent comparison of simulation data with electroencephalogram (EEG) measurements. Other settings which involve output from only a few key neurons are ripe for JJ Neuron models. Quantities such as voltage, current or flux at important points in the network can be measured directly, limited by the number of wires passing through the cooling apparatus. In addition, a variety of collective behaviors can be measured using already developed RSFQ logic circuits such as clocks, counters, splitters, followers, flip-flops and transmission lines [7]. So, while JJ Neuron simulations are not well suited to some questions, they are for others, especially those involving averaged or collective behaviors or producing output from a small fraction of neurons. Analog simulations will not replace digital simulations. Instead, they complement each other, with analog simulations providing collective measurement on long time scales and large networks, while digital simulations provide detailed measurements on shorter time scales and smaller networks.

We are pursuing a number of potential enhancements to our JJ Neuron circuit. Along with existing tunable circuit parameters that affect the threshold, refractory period, frequency, size and shape of APs, more flexibility is possible by considering circuits with more junctions representing additional ion channels. To the extent that bursting and other exotic neuron behavior is caused by relatively slow ion channels, adding a large capacitively shunted junction (with smaller characteristic frequency) should allow JJ Neurons to display these behaviors. Plasticity of synapses based on previous history may also be possible. Connection strength can be dynamically adjusted with additional circuitry in the synapse. If the adjustments are dependent on the firing history of the neurons involved, a Hebbian learning process would be possible.

Acknowledgments

We acknowledge the generous support of Colgate University's Picker Interdisciplinary Science Institute. Special thanks to Bruce Hansen, Jason Myers, and Lyle Roelofs for helpful conversations, Jon Habif, Damhnait McHugh, Terry Orlando and Joe Amato for helpful comments and Sarah Sciarrino for computational assistance.

-
- [1] J. G. King, M. Hines, S. L. Hill, H. Markram, P. H. Goodman, and F. Schurmann, "A component-based extension framework for large-scale parallel simulations in neuron", *Frontiers in Neuroinformatics* **3** (2009).
 - [2] H. Markram, "The blue brain project", *Nature Reviews Neuroscience* **7** FEB (2006) 153–160.
 - [3] "Roadrunner supercomputer puts research at a new scale". Los Alamos National Laboratory News Release, 2008.
 - [4] F. C. Hoppensteadt and E. M. Izhikevich, "Weakly connected neural networks", Springer-Verlag, 1997.
 - [5] E. M. Izhikevich, "Which model to use for cortical spiking neurons?", *IEEE Transactions on Neural Networks* **15** (2004), no. 5, 1063–1070.
 - [6] D. Brock, "Rsfq technology: Circuits and systems", *International journal of high speed electronics and systems* **11** (2001) 307–362.
 - [7] P. Bunyk, K. Likharev, and D. Zinoviev, "Rsfq technology: Physics and devices", *Int. Journal on High Speed Electronics and Systems* **11** (2001) 257–306.
 - [8] K. Likharev and V. Semenov, "Rsfq logic/memory family: A new josephson-junction technology for sub-terahertz-clock-frequency digital systems", *IEEE Transactions on Applied Superconductivity* **1** (1991) 3–28.
 - [9] D. K. Brock, E. K. Track, and J. M. Rowell, "Superconductor ics: The 100 ghz second generation", *IEEE Spectrum*, December 2000 40–46.
 - [10] A. L. Hodgkin and A. F. Huxley, "A quantitative description of membrane current and its application to conduction and excitation in nerve", *J. Physiol.* **117** (1952) 500–544.
 - [11] R. A. FitzHugh, "Impulses and physiological states in theoretical models of nerve membrane", *Biophysical Journal* **1** (1961) 445–466.
 - [12] J. Nagumo, S. Arimoto, and S. Yoshizawa, "An active pulse transmission line simulating nerve axon", *Proc. IRE* **50** (1962) 2061–2070.
 - [13] C. Morris and H. Lecar, "Voltage oscillations in the barnacle giant muscle fiber", *Biophysical Journal* **35** (1981) 193–213.
 - [14] J. L. Hindmarsh and R. M. Rose, "A model of the nerve impulse using two first-order differential equations", *Nature* **296** (1982) 162–164.

- [15] F. Rieke, D. Warland, R. de Ruyter van Steveninck, and W. Bialek, “Spikes: Exploring the neural code”, MIT Press, 1999.
- [16] D. Johnston and S. M.-S. Wu, “Foundations of cellular neurophysiology”, MIT Press, 1995.
- [17] J. R. Clay, “Axonal excitability revisited”, *Progress in Biophysics and Molecular Biology* **88** (2005) 59–90.
- [18] C. A. Vandenberg and F. Bezanilla, “A sodium channel gating model based on single channel, macroscopic ionic, and gating currents in the squid giant axon”, *Biophysical Journal* **60** (1991) 1511–1533.
- [19] B. Josephson, “Possible new effects in superconductive tunnelling”, *Physics Letters* **1** (1962) 251–253.
- [20] T. Orlando and K. Delin, “Foundations of applied superconductivity”, Addison-Wesley, 1991.
- [21] F. Gabbiani and C. Koch, “Principles of spike train analysis”, in “Methods in Neuronal Modeling”, C. Koch and I. Segev, eds., ch. 9, pp. 313–360. MIT Press, 2 ed., 1998.
- [22] E. R. Kandel, J. H. Schwartz, and T. M. Jessell, eds., “Principles of neural science”, McGraw-Hill, 4 ed., 2000.
- [23] A. M. Kadin, “Introduction to supercomputing circuits”, Wiley, USA, 1999.
- [24] C. Bartolozzi and G. Indiveri, “Synaptic dynamics in analog vlsi”, *Neural Comput.* **19** (2007), no. 10, 2581–2603.
- [25] G. Cauwenberghs and M. Bayoumi, “Learning on silicon— adaptive vlsi neural systems”, Kluwer Academic, Norwell, MA, 1999.
- [26] R. Douglas and M. Mahowald, “Design and fabrication of analog vlsi neurons”, in “Methods in Neuronal Modeling”, C. Koch and I. Segev, eds., ch. 8, pp. 293–312. MIT Press, 2 ed., 1998.
- [27] F. Hoppensteadt, “An introduction to the mathematics of neurons”, Cambridge University Press, 1997.
- [28] F. Hoppensteadt, “Biologically inspired circuits: Coalition formation in aggregates”, *Int. Journal of Bifurcation and Chaos* **16** (2006) 3349–3355.
- [29] J. Keener, “Analogue circuitry for the fitzhugh-nagumo equations”, *IEEE Trans. Syst. Man and Cybern.* **13** (1983) 1010–1014.
- [30] C. Koch and I. Segev, “Methods in neuronal modelling”, MIT Press, 2nd ed., 1998.
- [31] G. Indiveri, E. Chicca, and R. Douglas, “A vlsi array of low-power spiking neurons and bistable synapses with spike-timing dependent plasticity”, *IEEE transactions on neural networks* **17** (2006).
- [32] C. Mead, “Analog vlsi and neural systems”, Addison-Wesley, 1989.
- [33] K. Hynna and K. Boahen, “Silicon neurons that burst when primed”, in “IEEE International Symposium on Circuits and Systems, 2007. ISCAS 2007.”, pp. 3363–3366. 2007.
- [34] C. Bartolozzi and G. Indiveri, “Global scaling of synaptic efficacy: Homeostasis in silicon synapses”, *Neurocomputing* **72** (2009) 726–731.